


Temporary
Anti-skid

LINE TAPE

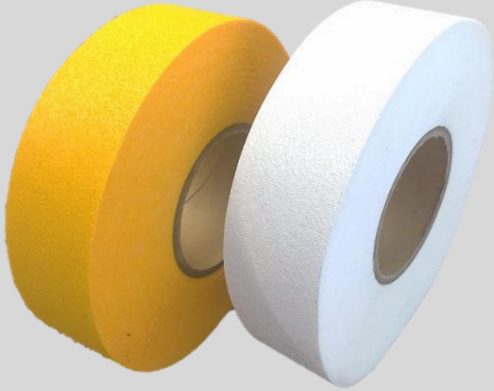


High-reflectivity

Excellent visibility at night



Quick & Easy installation with rubber mallet

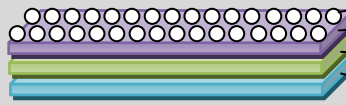

Glass beads

Adhesive layer

Nonwoven fabric

Pressure-sensitive
Adhesive

Installation



Parking



Airport



Factory / Warehouse

Specifications

Size	5cm / 15cm wide x 46m long
Color	Yellow / White
Thickness	0.6mm
Tensile strength	400N/5cm or more
Adhesive strength	45N/5cm or more against stainless steel
Recommended surface	Asphalt / Concrete
Durability	Approx. 2 weeks <small>*depending on traffic volume and installation place</small>

Note) This is representative value measured by Japanese Industrial Standards, not guaranteed value.

How to install

1. Sweep the road surface.
2. Apply the Line Tape.
3. Tap with rubber mallet to help it form to the rough surface.

[Removal] Peel off the Line Tape slowly from edge.

MADE IN JAPAN

KANBO PRAS